

2-Stage Battery Charger

192Watt, 14Amp

SARGENT
wired for innovation



The PF200 two-stage battery charger is ideal for leisure applications, providing power for both battery charging and 12 volt appliances within a very compact size. The unit can run silently even under full load, due to its efficient fanless design.



PF200

Specification	PF200
Power	192W
Input Voltage	100-240VAC
Charging Current (max)	14A @13.8V
Output Voltage	13.8V
Compatible batteries	Flooded *
Battery size	85 - 220Ah
Cooling method	Passive
Dimensions (LxWxH)	200x63x35mm
Weight	0.84kg

* its is recommended to confirm compatibility with the manufacturer, for the specific battery being used

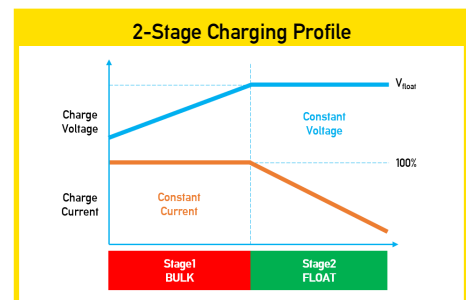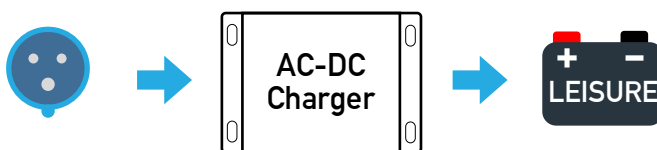

- **Multi-Stage charging** - 2-Stage profile maximises charge into the leisure battery
- **High capacity output** - up to 14 Amps for charging batteries from 85 to 220Ah
- **High efficiency** - ensures cool running, suitable for use in restricted spaces
- **Silent operation** - from fanless cooling
- **Fully protected** - built-in overload, short circuit & over temperature protection