
Fireblitz extinguisher



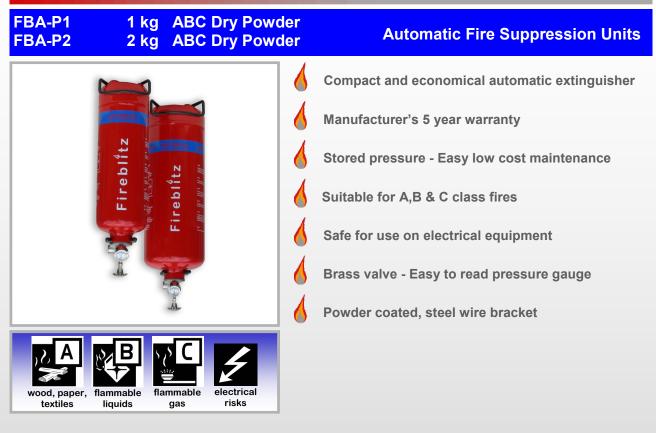

Commonly used to protect machinery/plant and where there is a risk of fire such as in boat/vehicle engine compartments. The unit required is determined by the floor area of that compartment. Only one unit should be installed in any one compartment and should provide the total protection required for that compartment.

Model	FBA-P1	FBA-P2
Capacity	1 kg	2 kg
Total Weight	2.14 kg	3.6 kg
Total Height	330 mm	380 mm
Total Width (including bracket)	95 mm	125 mm
Working Temp.	-20 ⁰ to +60 ⁰ C	-20 [°] to +60 [°] C
Discharge Time / Temperature	Under 10 secs @ 79°C ± 5°C	Under 10 secs @ 79°C ± 5°C
Maximum Area Protected	1.0 m ²	2.0 m ²
Operating Pressure	12 bar @ 20ºC	12 bar @ 20ºC
Minimum Burst Pressure	55 bar	55 bar
Packing Specification		
Qty Per Carton	1	1
Carton Dimensions	36x13x9 cm	46x12x12 cm
Carton Volume	0.004 m ³	0.007 m ³
Carton Weight	2.25 kg	3.75 kg
Qty Extinguishers per Pallet	288	200
Pallet Dimensions	120x100x120 cm	120x100x136 cm
Pallet Volume	1.440 m ³	1.632 m ³
Pallet Gross Weight	670 kg	772 kg

FBA-P1 provides protection for 1.00m² of floor space FBA-P2 provides protection for 2.00m² of floor space